



### Installation Manual v1.1: Wastegate Actuator Sensor Jumper 2003 – Up Dodge

**Please read all instructions before installation.**

1. The factory turbo uses a wastegate sensor in the compressor housing. The ATS turbo kit does not require this sensor to operate. If the sensor is unplugged, the computer will see an open circuit and send a trouble code. Use the jumper included in this kit to complete the circuit. **Plug in the jumper to the engine harness. Discard the factory sensor.**

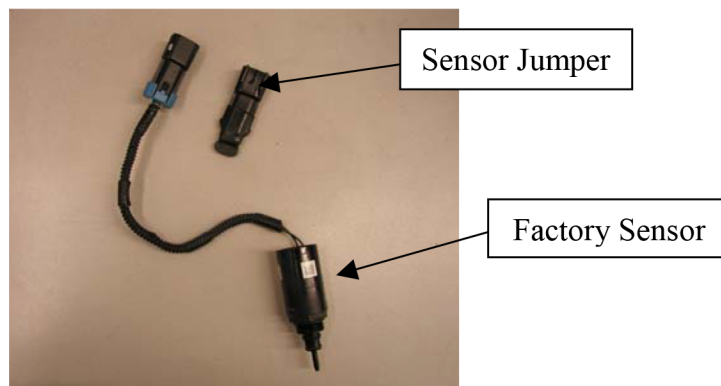

2. The sensor is located in the front of the compressor housing as show below and connects to the harness behind the oil filter.

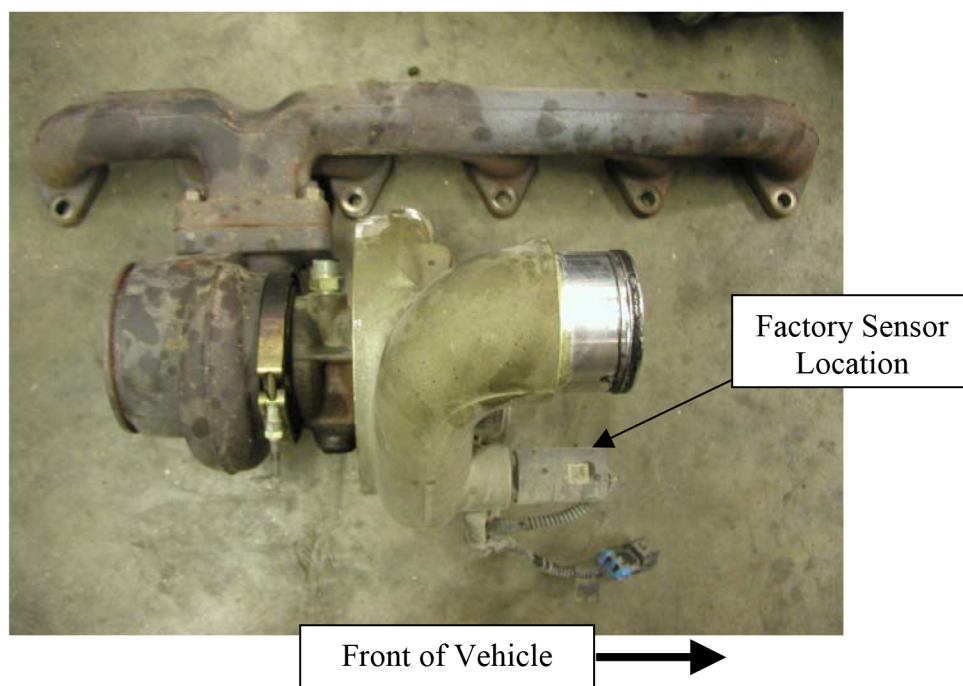

## **Have Any Questions?**

Thank you for purchasing the ATS Dodge Turbo Kit. Please check our website at <http://www.atsdiesel.com> for technical support and other performance products such as the 5-Star™ torque converter, ATS High Performance Valve Body and ATS High Performance Transmission along with our full line of power enhancers. Please call or e-mail our Technical Service Department, 8:00am to 5:30pm Mountain Standard Time, Monday through Friday.

### **Contact Information**

Toll Free: 800-949-6002

Local: 303-431-7973

Fax: 303-431-01135

Website: [www.ATSDiesel.com](http://www.ATSDiesel.com)

Email: [info@ATSDiesel.com](mailto:info@ATSDiesel.com)

We strive to make our instructions as clear and complete as possible. To achieve this, our instructions are under constant construction. We encourage you to visit our Technical Support Website (<http://www.atsdiesel.com/ATSWebSite/Technical.asp>) to check for the most up-to-date manuals and diagrams as well as other information. If you have any suggestions as to how we can improve this installation manual, let us know at <mailto:Suggestions@ATSDiesel.com>.