


## 2001 24 Valve Boost Fooler

202-906-2248

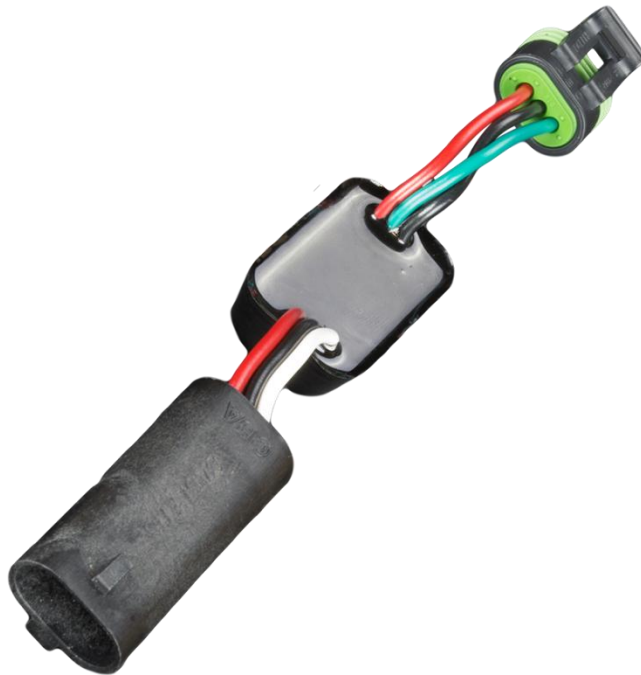

Thank you for purchasing the ATS Diesel Performance Boost Fooler! This product is designed to be “Plug and Play” meaning there is no cutting or soldering required with this product. Installation should just take a few minutes and your truck will be ready to go!

## Step 1


Locate the MAP sensor



The MAP sensor is located on the driver side of engine, directly behind the factory fuel filter towards the firewall.

## Step 2

Unplug the factory MAP sensor connector and plug in the Boost Fooler accordingly.

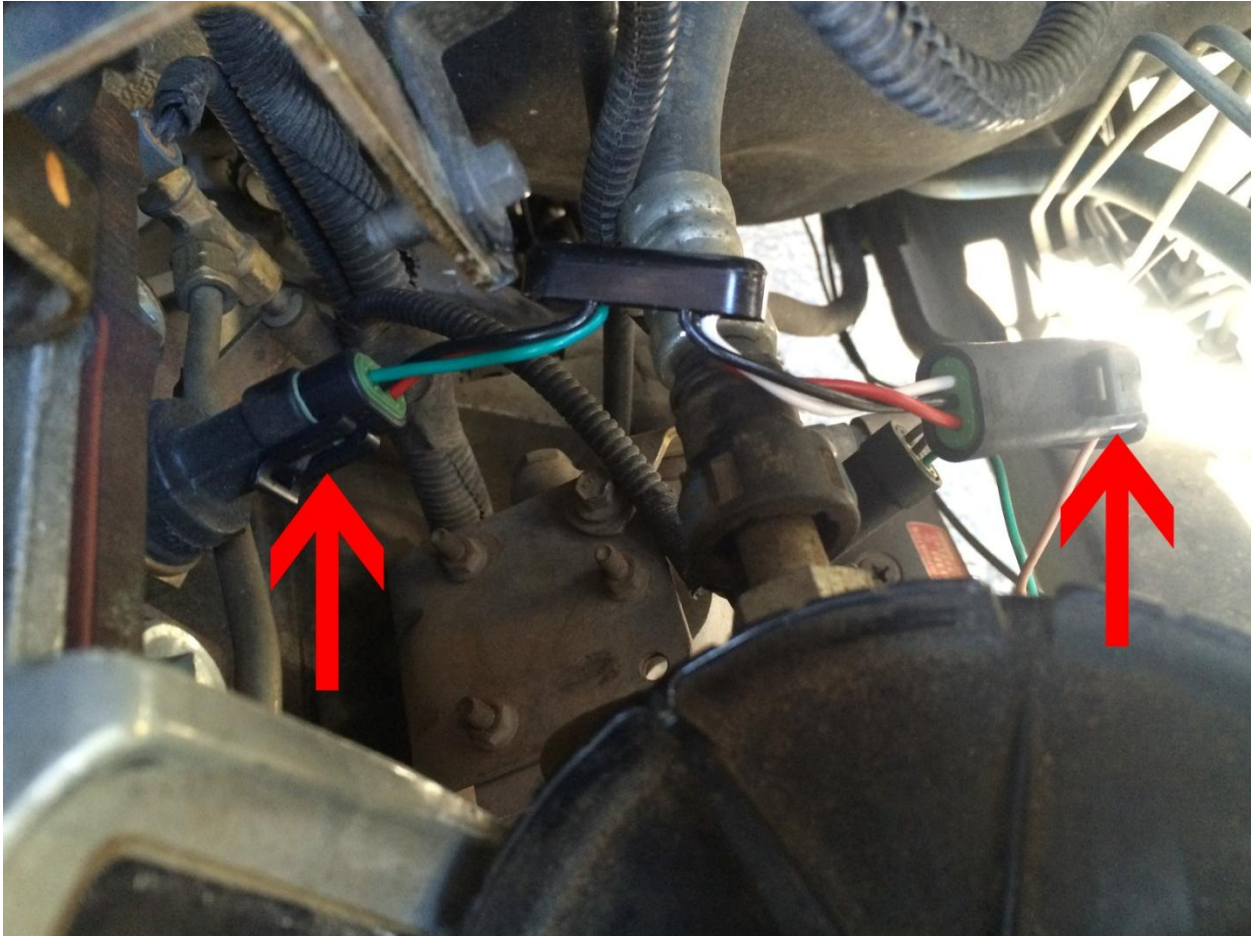

After you have plugged the factory harness into the Boost Fooler you are done! As stated earlier the Boost Fooler was designed to be “Plug and Play” for a simple and fast installation.